



LIMBA

SUSPENDED LUMINAIRE

LIMBA – Suspended luminaire for professional accentuated lighting in vintage design. The lampshade made of aluminium is as standard coloured on the outside and white on the inside and a textile cable underscores the high-quality appearance. In that way LIMBA becomes a decorative eyecatcher. Individual colour combinations are possible on request.



Ideal applications

A decorative eyecatcher to round off the store design
Vintage look meets modern technology



Customised style

The selection of cable and shade colours permits personal colour schemes: design your own personal LIMBA with the Style Generator!



Wide LED range

Large choice between professional LED equipment and filament lamps for E27 socket






High lighting quality

Opal acrylic ring for perfect glare suppression and long-distance effect



Fast reflector replacement

Five beam angles for optimum goods illumination



LIMBA


oktalite




www.oktalite.com/limba-p

Type of luminaire	suspended luminaire
Application areas	Decorative lighting
Pan/tilt range	fixed
Mounting	3P Power Track, recessed, Surface mounted
Ceiling thickness	1 - 25 mm
Lighting technology	E27
Lamp power	max. 60 W
Supply unit	Direct mains connection integrated, Driver integrated
Luminaire colour	RAL 9005 jet black

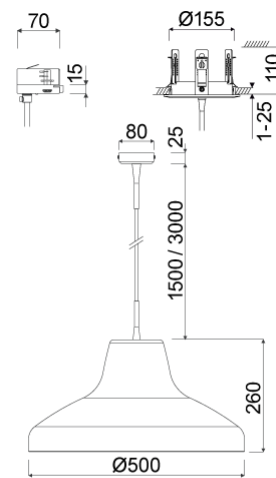

	RAL 9016 traffic white
	Special colours on request
Surface	structure powder-coated
Suspension length	1500mm, 3000mm
Nominal voltage	220 - 240 V, 50/60Hz
Weight	Approx. 2.4 kg



Components	 Luminaire housing
	 Optic
	 Lamp

Test seal	    
-----------	---

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29

**LIMBA****oktalite**

Lighting technology	Mounting	Mount Color	Suspension length	Order number		
				white	silver	black
E27	3P Power Track	RAL 9016 traffic white	1500mm	10160170		
E27	3P Power Track	RAL 9016 traffic white	3000mm	10160171		
E27	3P Power Track	RAL 9005 jet black	1500mm			10160172
E27	3P Power Track	RAL 9005 jet black	3000mm			10160173
E27	Surface mounted H3	RAL 9016 traffic white	1500mm	10160174		
E27	Surface mounted H3	RAL 9016 traffic white	3000mm	10160175		
E27	Surface mounted H3	RAL 9005 jet black	1500mm			10160176
E27	Surface mounted H3	RAL 9005 jet black	3000mm			10160177
E27	recessed H19 (Ø 130mm)	RAL 9016 traffic white	1500mm	10247893		
E27	recessed H19 (Ø 130mm)	RAL 9016 traffic white	3000mm	10247894		
E27	recessed H19 (Ø 130mm)	RAL 9005 jet black	1500mm			10247895
E27	recessed H19 (Ø 130mm)	RAL 9005 jet black	3000mm			10247896

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29



Lamp - E27

E27

oktalite

LED Luminous Flux Class	Light colour	Lamp power	CRI R _a	Manufacturer	Lamp surface	Dimmable	Order number
1055 lm	2700 K	12 W	82	Osram	matt	dimmable	10213213
806 lm	2700 K	6,5 W	82	Osram	clear filament	non-dimmable	10259205

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29